SR220 THRU SR2200







FEATURES

- * Low forward voltage drop
- * High current capability
- * High reliability
- * Low Power Loss, High Efficiency


MECHANICAL DATA

- * Case: M dded plastic
- * Epoxy: UL 94V-0 rate flameretardant
- * Lead: Axial leads, solderable per M L-STD-202, method 208 guranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any * Weight: 0.34 grams

VO LTAG ERANG E 20 to 200 Volts

CURRENT

2.0 Am pere

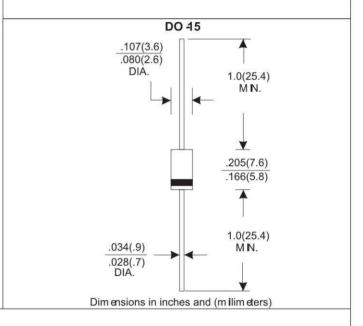

Maximum Ratings and Electrical Characteristics

- * Rating at 25 °C am bient tem perature unless otherwise specified.
- * Single phase, half wave, 60 Hz, resistive or inductive load.
- * For capacitive load, derate current by 20%

* For capacitive load, derate current by 20%	7								-		
Type Number	Symbol	SR 220	SR 230	SR 240	SR 250	SR 260	SR 280	SR 2100	SR 2150	SR 2200	Unit
Maximum Repetitive Peak Reverse Voltage	VRRM	20	30	40	50	60	80	100	150	200	V
Maximum RMS Voltage	VRMS	14	21	28	35	42	56	70	105	140	٧
Maximum DC Blocking Voltage	VDC	20	30	40	50	60	80	100	150	200	V
Maximum Average Forward Rectified Current	IF	2.0								Α	
Peak Forward Surge Current, 8.3 m s Single Half Sine-wave Superim posed on Rated Load (JEDEC m ethod)	IFSM	50									А
Maximum Instantaneous Forward Voltage @2A	VF	0.55			0.	70	0.85		0.95		V
Maximum Reverse Current @ Rated VR TA=25 ℃ TA=125℃	IR	200 500								uA	
Typical Junction Capacitance (Note 1)	Cj	100									pF
Typical Therm a Resistance(Note 2)	RθjA	5									°C/w
O perating and Storage Tem perature Range	TJ	-65+150									°C

NO TE1. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

NO TE2. Leads maintained at ambient temperature at a distance of 9.5m m from the case

RATING SAND CHARACTERISTIC CURVES (SR220 THRU SR2200)

FIG 1-TYPICAL FO RWARD
CHARACTERISTICS

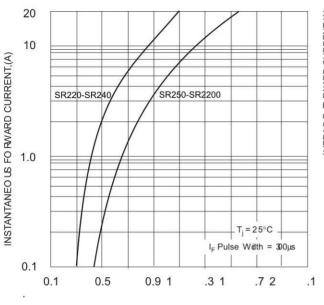


FIG 2-TYPICAL FO RWARD CURRENT DERATING CURVE

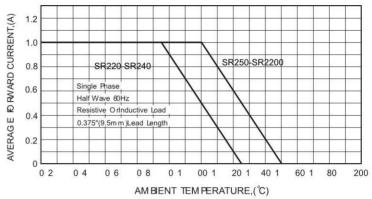


FIG 4-MAXIMUMNO NREPETITIVE FORWARD SURGE (CURRENT

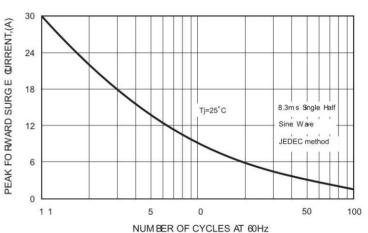


FIG 3 -TYPICAL REVERSE

FORWARD VOLTAGE(V)

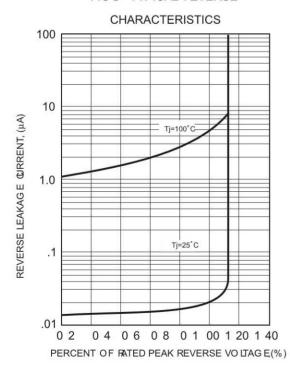


FIG 5-TYPICAL JUNCTION CAPACITANCE

