SR120 THRU SR1200



1.0 A Schottky Barrier Rectifier



FEATURES


- * Low forward voltage drop
- * High current capability
- * High reliability
- * Low Power Loss, High Efficiency

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Axial leads, solderable per MIL-STD-202, method 208 guranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any * Weight: 0.34 grams

VOLTAGE RANGE 20 to 200 Volts CURRENT

1.0 Ampere

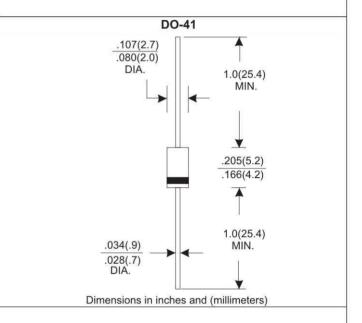

Maximum Ratings and Electrical Characteristics

- * Rating at 25 °C ambient temperature unless otherwise specified.
- * Single phase, half wave, 60 Hz, resistive or inductive load.
- * For capacitive load, derate current by 20%

Type Number	Symbol	SR 120	SR 130	SR 140	SR 150	SR 160	SR 180	SR 1100	SR 1150	SR 1200	Unit
		965-AV007C	0	un Belloope		20000000	0.0013000	5	32772723200		
Maximum Repetitive Peak Reverse Voltage	VRRM	20	30	40	50	60	80	100	150	200	٧
Maximum RMS Voltage	VRMS	14	21	28	35	42	56	70	105	140	V
Maximum DC Blocking Voltage	VDC	20	30	40	50	60	80	100	150	200	V
Maximum Average Forward Rectified Current	JF	1.0									Α
Peak Forward Surge Current, 8.3 ms Single Half	IFSM	30									Α
Sine-wave Superimposed on Rated Load											
(JEDEC method)											
Maximum Instantaneous Forward Voltage @1A	VF	0.55			0.	70	0.85		0.90	0.95	٧
Maximum Reverse Current @ Rated VR TA=25 ℃		200									uA
TA=125°C	IR	500									urt
Typical Junction Capacitance (Note 1)	Cj	100									pF
Typical Thermal Resistance(Note 2)	RθjA	5									°C/w
Operating and Storage Temperature Range	TJ	-65+150									$^{\circ}\mathbb{C}$

NOTE1. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

NOTE2. Leads maintained at ambient temperature at a distance of 9.5mm from the case

RATINGS AND CHARACTERISTIC CURVES (SR120 THRU SR1200)

FIG.1-TYPICAL FORWARD

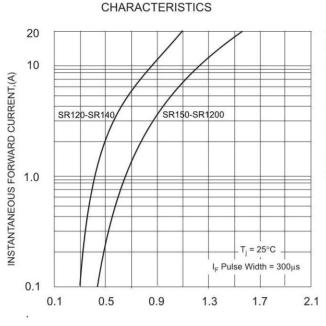


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

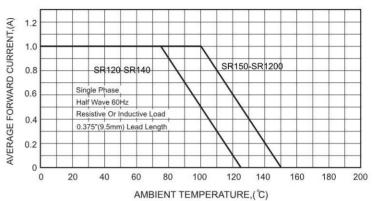


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

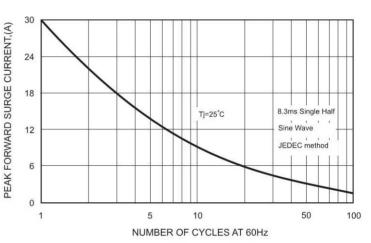


FIG.3 - TYPICAL REVERSE

FORWARD VOLTAGE,(V)

